

Description


Chinasound Piezo Transducer 17mm diameter, type B(=8.0mm height), 3Vp-p rated voltage – 4.0KHz resonant frequency – Pin length 3.5mm – RoHS compliant

- ◆ RoHS compliant
- ◆ Reliable Solid State Piezoelectric Technology
- ◆ Flame Retardant Plastic

Picture



Frequency Response Curve

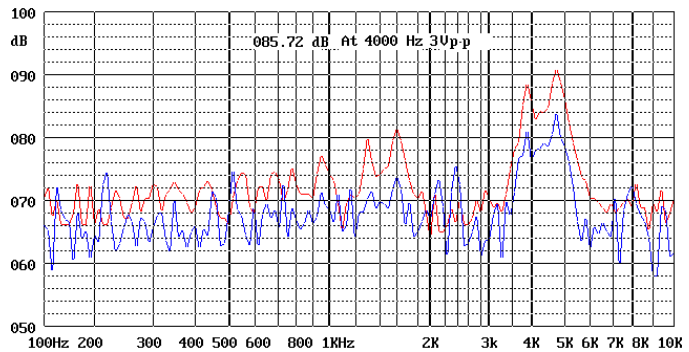

Specification

- Rated Voltage
- Operating Voltage
- Operating Frequency
- Typical Sound Output
- Rated Current
- Capacitance
- Operating Temp.
- Storage Temperature
- Termination

Construction Materials

- Weight (Typical)
- Reliability

- Description
- Termination Strength
- Case
- Diaphragm


- *Life Test
- *High Temperature
- *Low Temperature
- *Humidity
- *Thermal Shock
- *Vibration
- *Shock
- *Drop Test
- *Soldering Heat Resistance
- **Solderability

3 Vp-p, square wave
 1 - 30 Vp-p, square wave
 4,000+/-500Hz
 80dB min. at 3Vp-p 10cm 4KHz 25°C
 1 mA at 3Vp-p 4KHz 25°C
 15,000+/-30% pF at 100Hz 1Vrms
 -40°C to +105°C
 -40°C to +120°C
 2 soldering pins, Sn plated Brass
 Maximum of 9.8N (1kgs) for 10 seconds load pull test
 Plastic, Noryl PX9406 or equal
 Brass Disc
 1.16 g
 At 3 Vp-p, 1 minutes ON 1 minutes OFF in room temperature continuously for 1000 hours
 No function at +120+/-2°C for 240 hours; Function at +105+/-2°C for 240 hours
 No function at -40+/-2°C for 240 hours; Function at -40+/-2°C for 240 hours
 +40+/-2°C, 95+/-5%RH, 240 hours
 -40+/-2°C 0.5 hr → +25+/-2°C 0.25 hr → +105+/-2°C 0.5 hr → +25+/-2°C 0.25 hr. Temperature Go up or Drop time is 0.5 hr. 3 hrs per 1 cycle. Total is 5 cycles
 1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular directions for 2 hours
 980m/s² (=100g) shock for each mutually perpendicular directions, half sine wave, 3 times each
 Dropped naturally from 750mm height onto the surface of 10mm wooden board. 2 directions – upper and side of the part are applied
 Soldering pads are immersed in +350+/-5°C solder bath for 3+/-0.5 seconds
 Soldering pads are immersed in rosin for 5 seconds and then immersed in +350+/-5°C solder bath for 3+/-0.5 seconds

Warranty

For a period of one (1) year from date of manufacture under normal operations
 * All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber).
 **90% min. soldering pads shall be with solder.(except the edge of pad)

Dimensions (Unit:mm)

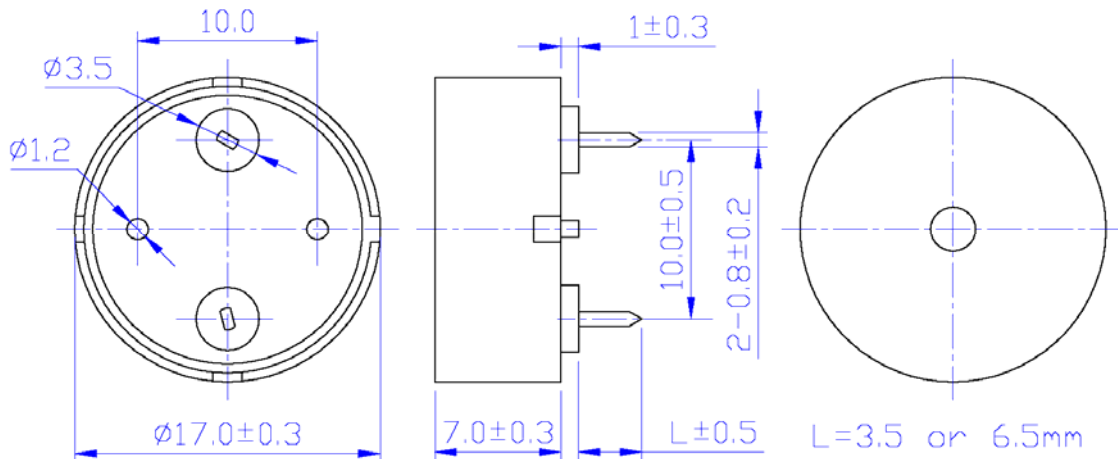

All specifications are subject to change without notice

Composed by: Guo Jun/060728 Checked by: Gao CL, Gong YS, Zhu YC/060728 Approved by: Wang Zhen/060728



CHANGZHOU CHINASOUND ELECTRONICS CO., LTD.
 Tel: +86-519-86182518 Fax: +86-519-86182519
<http://www.chinasound.com>
 email: csound@jmail.com.cn

Revisions History

Version Number	Description	Name
040211	Original,CPT17B03-4.0	Guo Jun
060728	RoHS compliant version, CPT17B03-4.0-P3.5R	Guo Jun

Composed by: Guo Jun/060728 Checked by: Gao CL, Gong YS, Zhu YC/060728 Approved by: Wang Zhen/060728

ChinaSound

CHANGZHOU CHINASOUND ELECTRONICS CO., LTD.

Tel: +86-519-86182518 Fax: +86-519-86182519

<http://www.chinasound.com>
email: csound@jmail.com.cn